


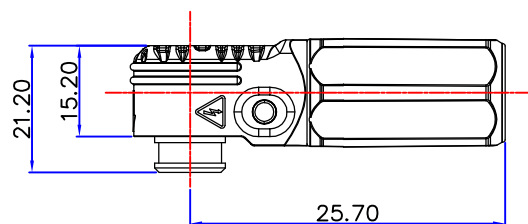




Product NO.		RHT-660-0059		
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Gavin	2021/07/26	JIM.KING

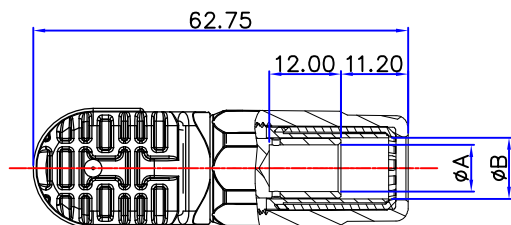

A	B	Cable mm ²	Rated Current
7.80	10.60	25	120
6.20	8.40	16	100
5.00	7.00	10	60

Electrical performance:
 Rated voltage:1000V ac
 Insulation voltage:3000VDC(1Min)
 Temperature Rise:4hrs<20°C

Mechanical behavior:
 Duribility:>2000 Cycles
 M&F Holding F:>200N
 Flame Retardant Grade:UL94-V0
 Operating temperature:-40°C~125°C

11	Insetion Sealing	Silicone		1
10	Flexcoils	C17200	Gold	3
9	Button Name	PA		1
8	Speing	Stainless Steel		1
7	Plastic Nut	PA		1
6	Plastic Button	PA		1
5	Cable Clamp	PA		1
4	Rubber Sesling	Silicone		1
3	O-Ring	Silicone		1
2	Socket	T2	Gold	1
1	Receptacle Shell	PA		1
NO	Description	Material	Finish	Qty

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	METABEE www.metabee.com				
	PART DESCRIPTION: ∅6.00mm 电缆10/16/25mm ² 单芯插头				
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 -120mm ± 0.30mm	Appd: JIM.KING	P/N: RHT-660-0059			
	Check:	Date	Scale	Unit	Type Page
Draw: Gavin	2021.07.26	Free	MM	Z	1/1