


Product NO.		RHT-660-0060		
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Gavin	2021/07/26	JIM.KING

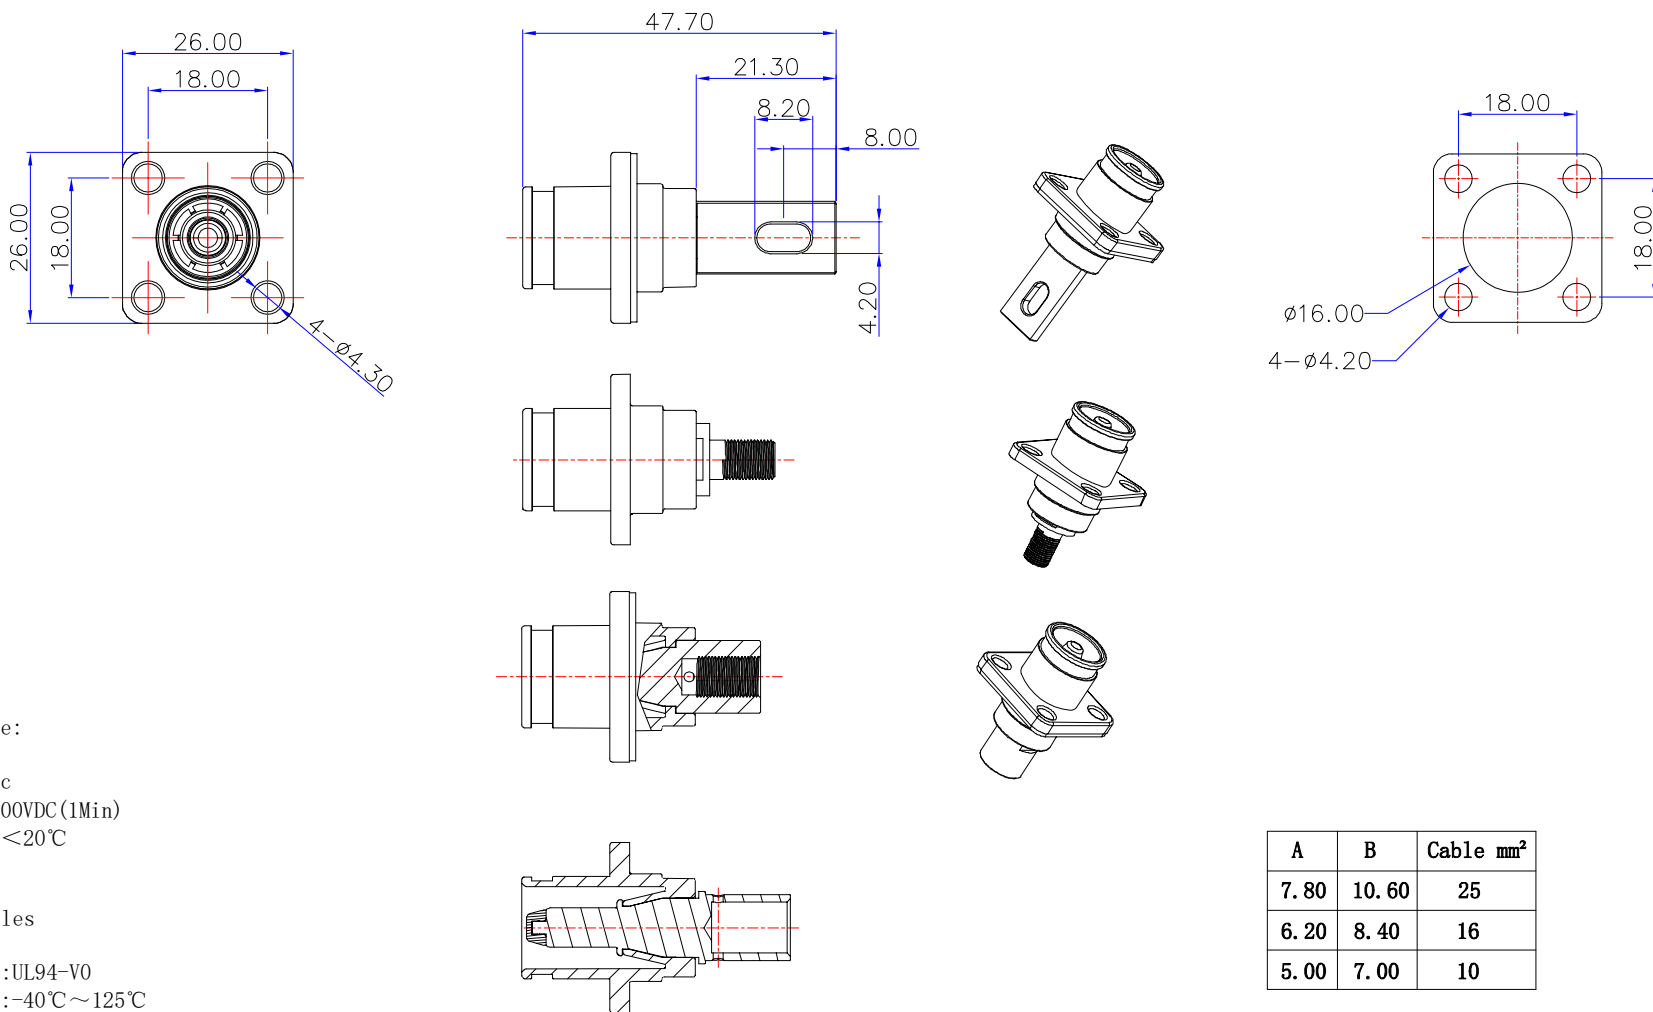

Electrical performance:
 Rated current:120A
 Rated voltage:1000V ac
 Insulation voltage:3000VDC(1Min)
 Temperature Rise:4hrs<20°C

Mechanical behavior:
 Duribility:>2000 Cycles
 M&F Holding F:>200N
 Flame Retardant Grade:UL94-V0
 Operating temperature:-40°C~125°C

A	B	Cable mm ²
7.80	10.60	25
6.20	8.40	16
5.00	7.00	10

4	Square Gasket	CR		1
3	Pin	T2		1
2	Finger Protection	PA	Gold	1
1	Plug Shell	PA		1
NO	Description	Material	Finish	Qty

-TOLERANCES-
UNLESS OTHERWISE SPECIFIED

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
 0.5 - 8mm ± 0.20mm
 8 - 30mm ± 0.25mm
 30 -120mm ± 0.30mm

METABEE www.metabee.com

PART DESCRIPTION:
ø6mm 插座

Appd: JIM.KING P/N: RHT-660-0060

Check:	Date	Scale	Unit	Type	Page
Draw: Gavin	2021.07.26	Free	MM	Z	1/1

A

B

C

D

E

1

2

3

4

5

6