
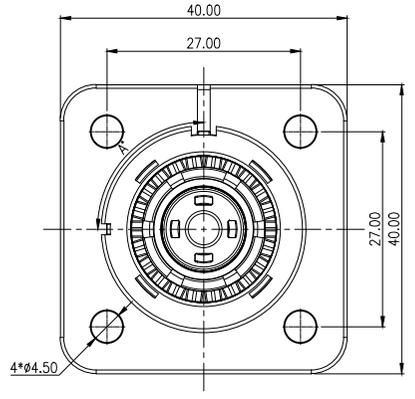
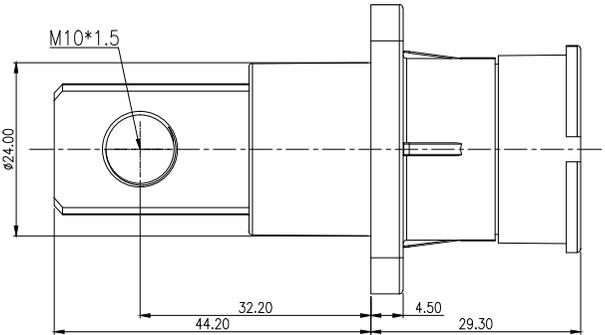
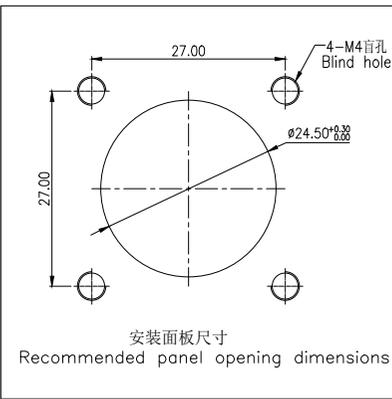


P/N	键位 KEY	颜色 Color	备注 Remarks
FSP240112CW-UM10B1	KEY-W	黑色 Black	常用键位 Standing key
FSP240112CZ-UM10A1	KEY-Z	橙色 Orange	
FSP240112CZ-UM10R1	KEY-Z	红色 Red	
FSP240112CX-UM10A1	KEY-X		备用键位
FSP240112CY-UM10A1	KEY-Y	橙色 Orange	Uncommon key
FSP240112CU-UM10B1	KEY-U		备用键位
FSP240112CV-UM10B1	KEY-V	黑色 Black	Uncommon key
FSP240112CN-UM10A1	KEY-N	橙色 Orange	无键位
FSP240112CN-UM10B1	KEY-N	黑色 Black	without key

REVISIONS					
REV	ECN NO	DESCRIPTION	DATE	BY	APPR
A1		RELEASE DRAWING	2019.08.21	ABLE	BENSON
A2	--	增加键位	2019.08.29	ABLE	BENSON
A3	--	增加英文说明	2019.12.25	ABLE	BENSON

键位 (A°)	KEY (A°)
90°	KEY-W
180°	KEY-X
247°	KEY-Y
293°	KEY-Z
67°	KEY-U
113°	KEY-V
无键位	KEY-N

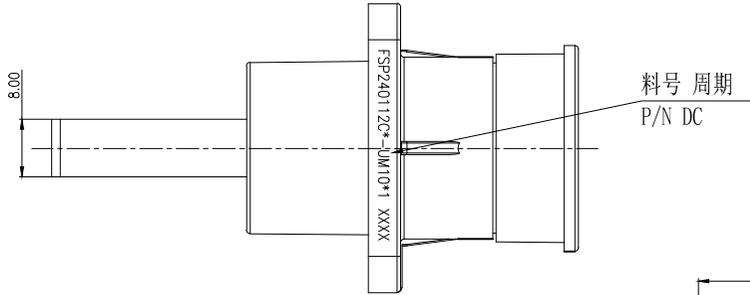

NOTE:

- 外观表面无划痕、划伤、污渍、异物等缺陷；  
No scratches, scratches, stains, foreign matters and other defects on the appearance surface;
- 产品功能说明参考 table 1:  
Refer to table 1 for product function description
- 产品使用PE袋+纸箱包装；  
Products are packed in PE bags + cartons
- 产品符合ROHS；  
Products comply with RoHS
- 使用M4组合螺丝锁紧面板，锁紧力 1.2-1.4N.M  
Use M4 combination screw to lock the mounting panel, and locking torque is 1.2-1.4N.M
- 要求使用带“瞬间制动”（达到设定扭力后即停止，并发出啷啷声）电批锁螺丝，不可使用无“瞬间制动”电批，若无符合上述要求之电批，可使用扭力扳手  
We should use the electric screwdriver with "instant brake" (stop immediately after reaching setting torque and make a click) to lock screw, and the screwdriver without "instant brake" cannot be used if there is no screwdriver with "instant brake", can use Torque spanner

TABLE 1:

项目 Item	规格 SPEC
额定电流 rated current	温升55K MAX: 300A/350A 温升40K MAX: 270A/320A
接线规格 wire spec	70mm <sup>2</sup> /95mm <sup>2</sup>
工作电压 Operating voltage	DC1500V
工作温度 Operating temperature	-40°C~+125°C
耐电压 withstand voltage	4000V AC/6400V DC
绝缘电阻 insulation resistance	5000MQ MIN(干燥 4h/24h) 200MQ MIN(RH 95%)
盐雾 salt fog	144H (配合状态下 matching state)
防护等级 protection Level	IP54B
插拔寿命 Durability life	500次 500cycling
接触电阻 Contact resistance	0.3 mΩ max
M10扭矩 M10 Mounting torque	15.0~18.0N.M

ITEM	PART NUMBER	Qty	DESCRIPTION	REMARK
MATERIALS LIST				
UNLESS OTHERWISE SPECIFIED 1) All dimensions are in metric(mm). 2) Tolerances are as follows: 1 PL DEC ±1.00 2 PL DEC ±0.50 Fractions ±1/64 3 PL DEC ±0.25 Angles ±2°			MATERIAL SPECIFICATIONS: SEE TABLE	www.metabee.com
签名 SIGNATURE			日期 DATE	METABEE LIMITED
制图 DRAWN			ABLE	2020.05.06
审核 CHECKED				
工艺 ENGINEER				
批准 APPROVAL				
客户 CUSTOMER				
			DRAWING TYPE CUSTOMER DRAWING	
			PART NO: FSP240112C*-UM10*1	
			12.0单芯弯头连接器插座	
			第三角投影 THIRD ANGLE PROJECTION	
			文件编号 FSCM NO. 幅面 SIZE 质量 MASS 版次 REV. 比例 SCALE	
			A4 9 A1 1:1	
			SHEET 1 OF 1 DWG NO: S-FSP240112C*-UM10*1	

