




Product NO.	Renhotec-610-0073			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2016/3/11	John kine

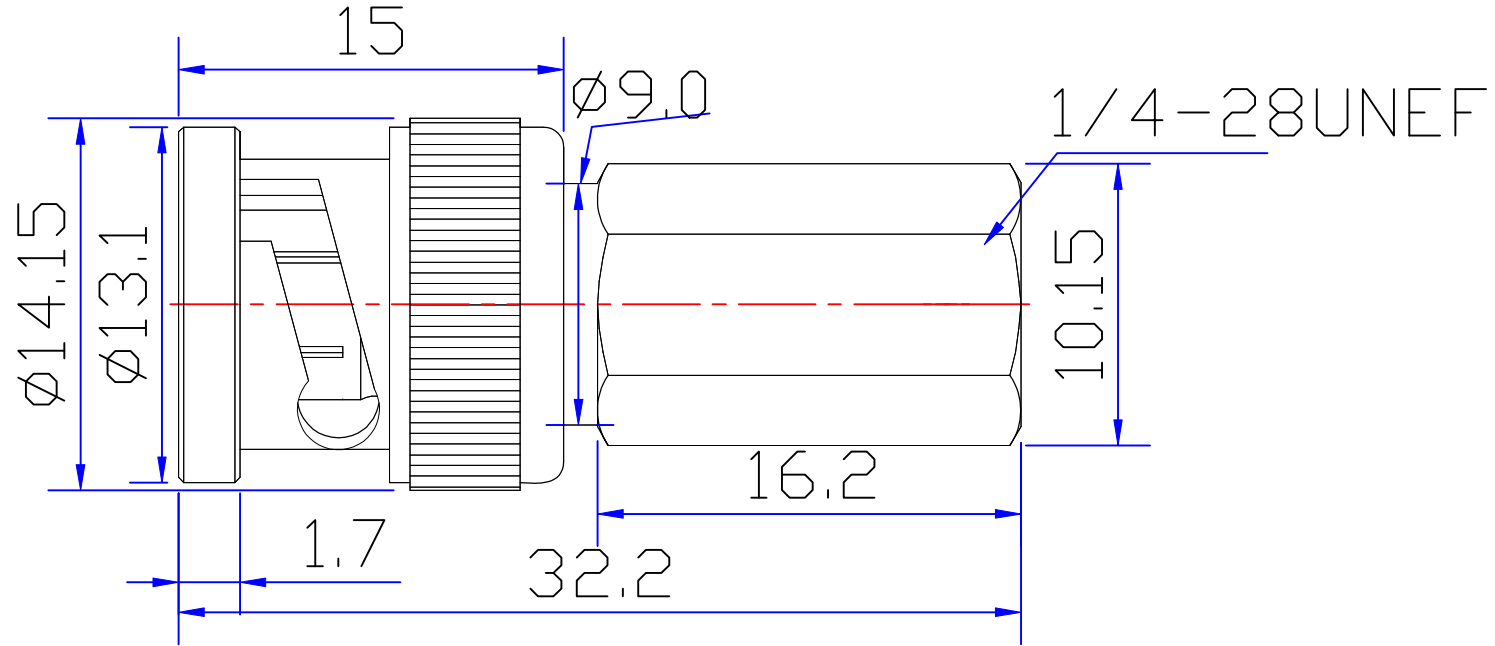

**Specification:**

Impedance: 50. Ohms

VSWR: 1.3MAX

Frequency range: DC~4G

Working Voltage: 500V rms @ sea level

Insulation resistance: 5000 Ohms min

Temperature range: -55°C TO +155°C

Relative temperature: ≤95% (40° C ±2° C)

Drawings products are in line with ROHS standards .

8					NOTE:	Tolerance	0-6	±0.10	 www.renhotec.com	<b>RENHOTEC GROUP</b>			
7							6-30	±0.20					
6					30-120	±0.30							
5	FERRULE	COPPER	NICKEL	1		Angular	±2°						
4	SLEEVE	DELIRIN	NATURAL	1	DRAWN	2016/03/			Name: BNC CONNECTOR FOR RG59/RG6 CABLE				
3	CONTACT PIN	BRASS	GOLD	1	Zelin. Zhang	11							
2	INSULATOR	DELIRIN	NATURAL	1	CHECKED			View	SIZE	Product NO. RENHOTEC-610-0073	REV		
1	SHELL/BODY	KIRSITE	NICKEL	1				UNIT	A		B		
	DESCRIPTION	MATERIAL	FINISH	QTY	APPROVALS	11/03.2016	SCALE	1:1	DateTime	2016/3/11	CAD FILE	D/company drawings/BD	SHEET: 1 OF 1