


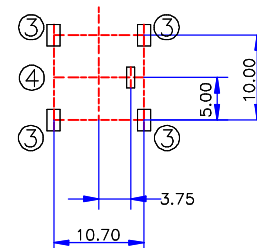




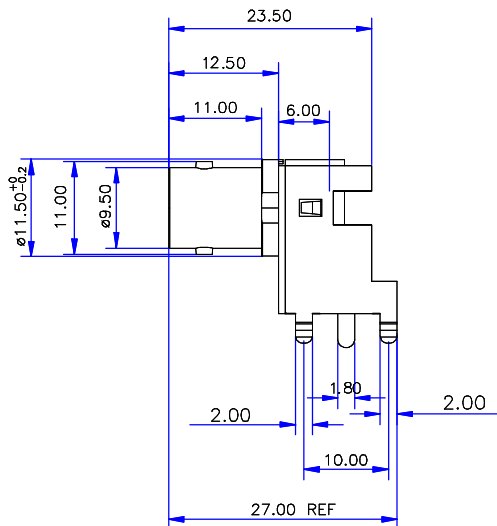

Product NO.	Renhotec-610-0041			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2016/3/07	John kine

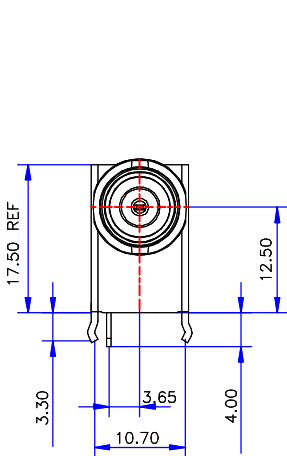

PCB MOUNTING HOLE



**Specification:**

Impedance: 50 Ohms

VSWR: 1.3 MAX

Frequency range: DC~4G



Working Voltage: 500V rms @ sea level

Insulation resistance: 5000 Ohms min


Temperature range: -55°C TO +155°C

Relative temperature: ≤95% (40°C ±2°C)

Drawings products are in line with ROHS standards.



CIRCUIT DIAGRAM



**NOTE:**

Tolerance


0-6 ±0.10  
6-30 ±0.20  
30-120 ±0.30  
Angular ±2°



**RENHOTEC GROUP**

DRAWN 2016/03/07  
Zelin. Zhang  
CHECKED

View



Name: BNC CONNECTOR

APPROVALS 07.03.2016  
John Kine

SCALE

1:1

DateTime 2016/3/07

CAD FILE D/company drawings/BD

SHEET: 1 OF 1

D				
C	INSULATOR	TEFLON	WHITE	1
B	CONTACT PLATING	BRASS	GOLD	1
A	BODY	IRSITE	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISHED	QTY