




Product NO.		RHT-614-0211	
REV	DESCRIPTION	DMN	DATE
A	First issue	Gavin	2018/03/12
			APPROVEN
			JIM.KING

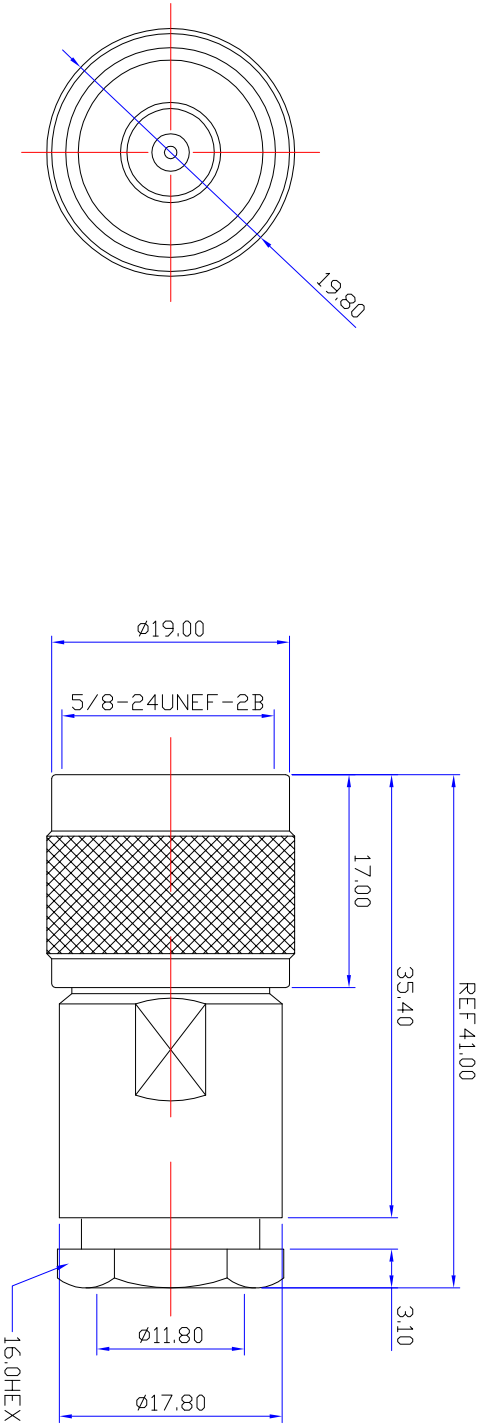

Specifications  
 Impedance: 50 Ohms  
 Frequency Range: 0-6G  
 VSWR: 1.5MAX  
 Working Voltage: 1000 VRMS (max at sea level)  
 Dielectric Withstanding Voltage: 1500 vrms (max at sea level)  
 Insulation Resistance: 5000 MOhms min  
 Durability Mating: 500 Cycles min  
 Temperature Range: -65°C T0 +165°C

3	PN	BRASS	GOLD	1
2	INSUKATON	PTFE	RED	1
1	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED		 <b>RENHOTECH GROUP</b> <a href="http://www.renhotech.com">www.renhotech.com</a>	
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm		PART DESCRIPTION: N PLUG FOR RG9/RG213 CABLE	
Appd: JIM KING	P/N: RHT-614-0211	Date	Scale
Check:		2018/03/12	MM
Draw: Gavin		Free	Unit
			Type
			Page
			1/1