




Product NO.		RHT-614-0230		
REV	DESCRIPTION	DMN	DATE	APPROVEN
A	First issue	Gavin	2018/03/12	JIM.KING

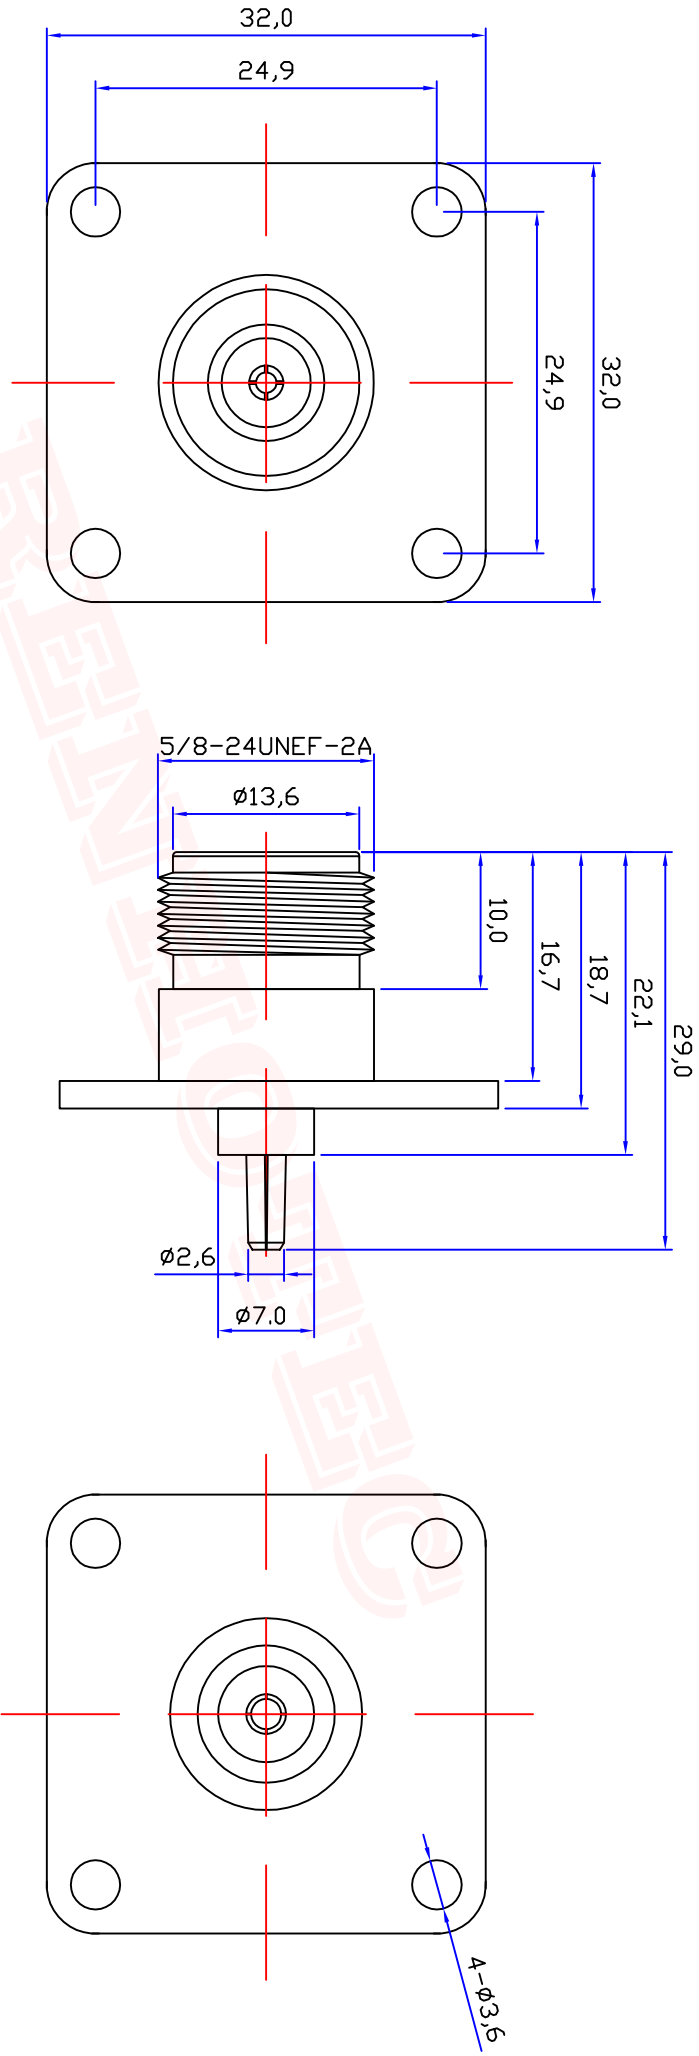

Specifications
 Impedance: 50 Ohms
 Frequency Range: 0-11G
 VSWR: 1.3MAX
 Working Voltage: 1000 VRMS (max at sea level)
 Dielectric Withstanding Voltage: 1500 vrms (max at sea level)
 Insulation Resistance: 5000 Ohms min
 Durability Mating: 500 Cycles min
 Temperature Range: -65°C T0 +165°C

3	PIN	BRASS	GOLD	1
2	INSULATION	TEFLON	WHITE	1
1	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

-TOLERANCES-
 UNLESS OTHERWISE SPECIFIED

UNLESS OTHERWISE SPECIFIED
 TOLERANCES FOR MILLIMETERS ARE:
 0.5 - 8mm ± 0.20mm
 8 - 30mm ± 0.40mm
 30 - 120mm ± 0.50mm

Appd: JIM.KING
 Check:
 Draw: Gavin

PART DESCRIPTION:
 N JACK CONNECTORS

P/N: RHT-614-0230
 Date: 2018/03/12
 Scale: Free
 Unit: MM
 Type: Z
 Page: 1/1

RENHOTES
www.renhotes.com

RENHOTES GROUP