




| | | | |
|-------------|-------------|--------------|------------|
| Product NO. | | RHT-614-0213 | |
| REV | DESCRIPTION | DWN | DATE |
| A | First Issue | Gavin | 2018/03/12 |
| | | | APPROVEN |
| | | | JIM. KING |

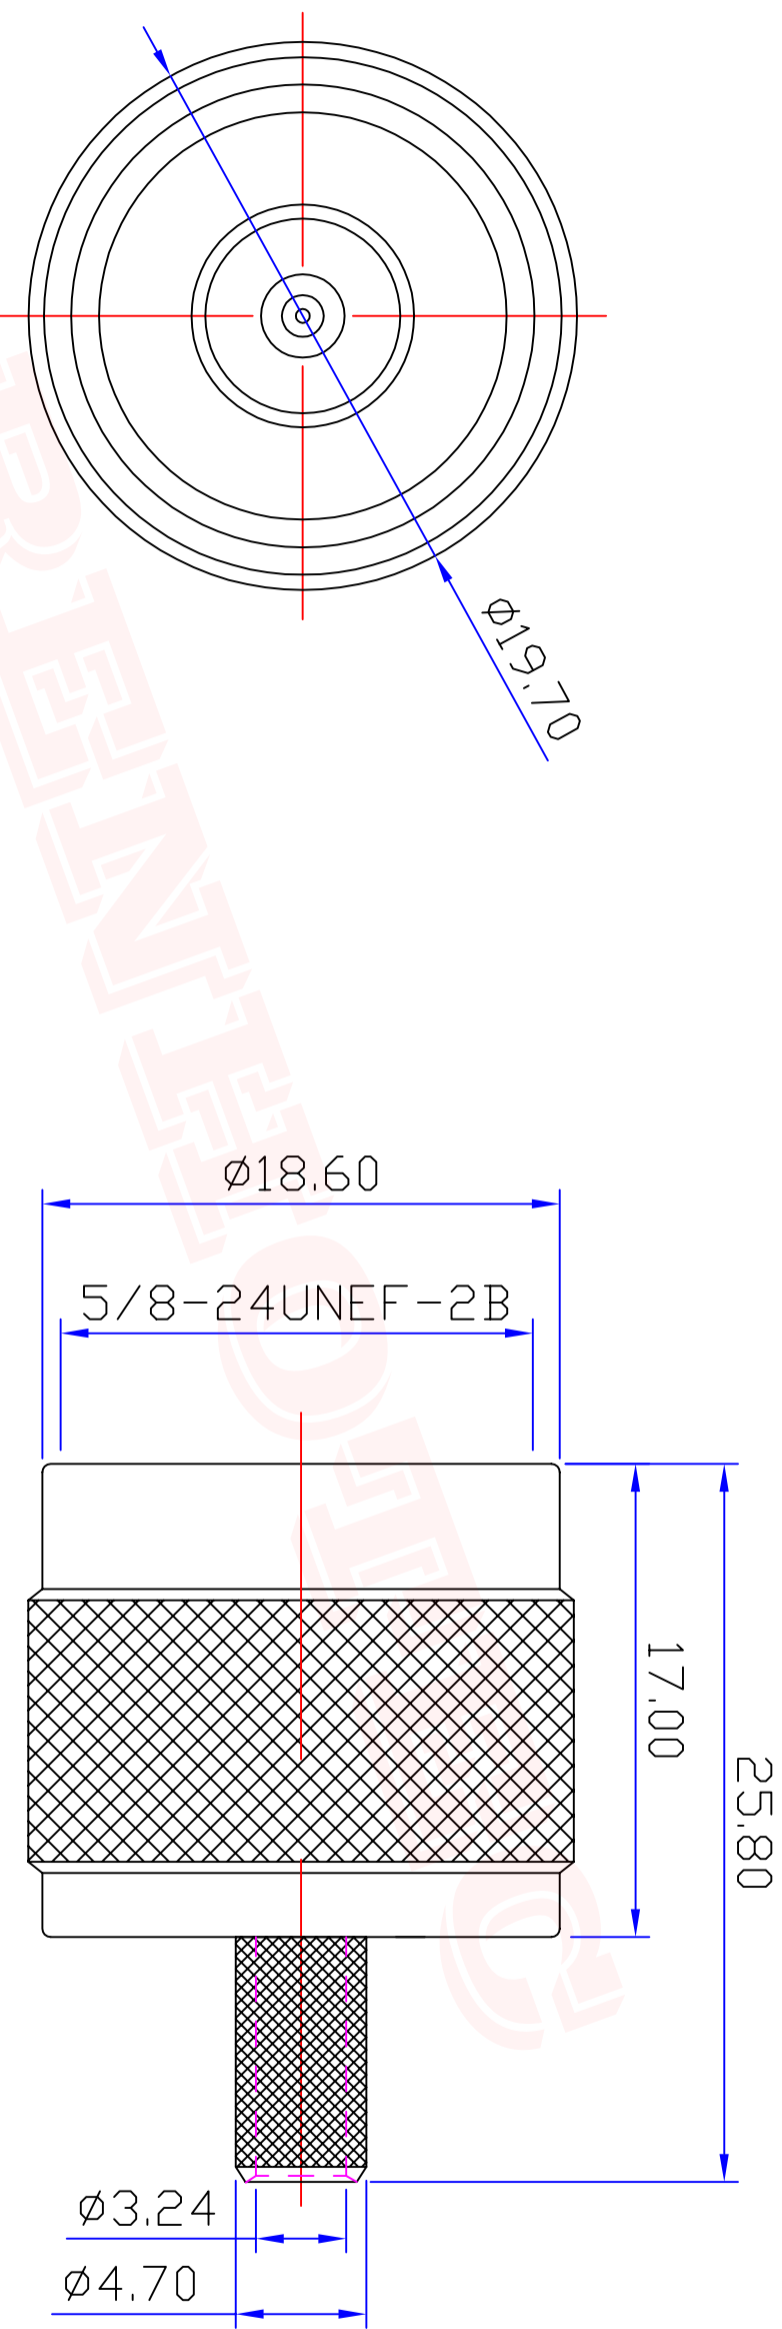

Specifications

Impedance: 50 Ohms
 Frequency Range: 0-11G
 VSWR: 1.3MAX
 Working Voltage: 1000 VRMS(max at sea level)
 Dielectric Withstanding Voltage: 1500 vrms(max at sea level)
 Insulation Resistance: 5000 Ohms min
 Durability Mating: 500 Cycles min
 Temperature Range: -65°C TO +165°C

| | | | | |
|----|-------------|----------|--------|-----|
| 3 | PIN | BRASS | GOLD | 1 |
| 2 | INSUKATON | TEFLON | RED | 1 |
| 1 | BODY | BRASS | NICKEL | 1 |
| NO | DESCRIPTION | MATERIAL | FINISH | QTY |

| | | | | | |
|--|--|--|-------|---|------|
| -TOLERANCES- UNLESS OTHERWISE SPECIFIED | | | | RENHOTECH GROUP | |
| UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm | | Appd: JIM. KING Check: Draw: Gavin | | P/N: RHT-614-0213 PART DESCRIPTION: N R/A MALE FOR RG58 CABLE | |
| | | Date | Scale | Unit | Type |
| | | 2018/03/12 | Free | MM | Z |
| | | | | | Page |
| | | | | | 1/1 |