




Product NO.		RHT-614-0208	
REV	DESCRIPTION	DWN	DATE
A	First Issue	Gavin	2018/03/12
			APPROVEN
			JIM. KING

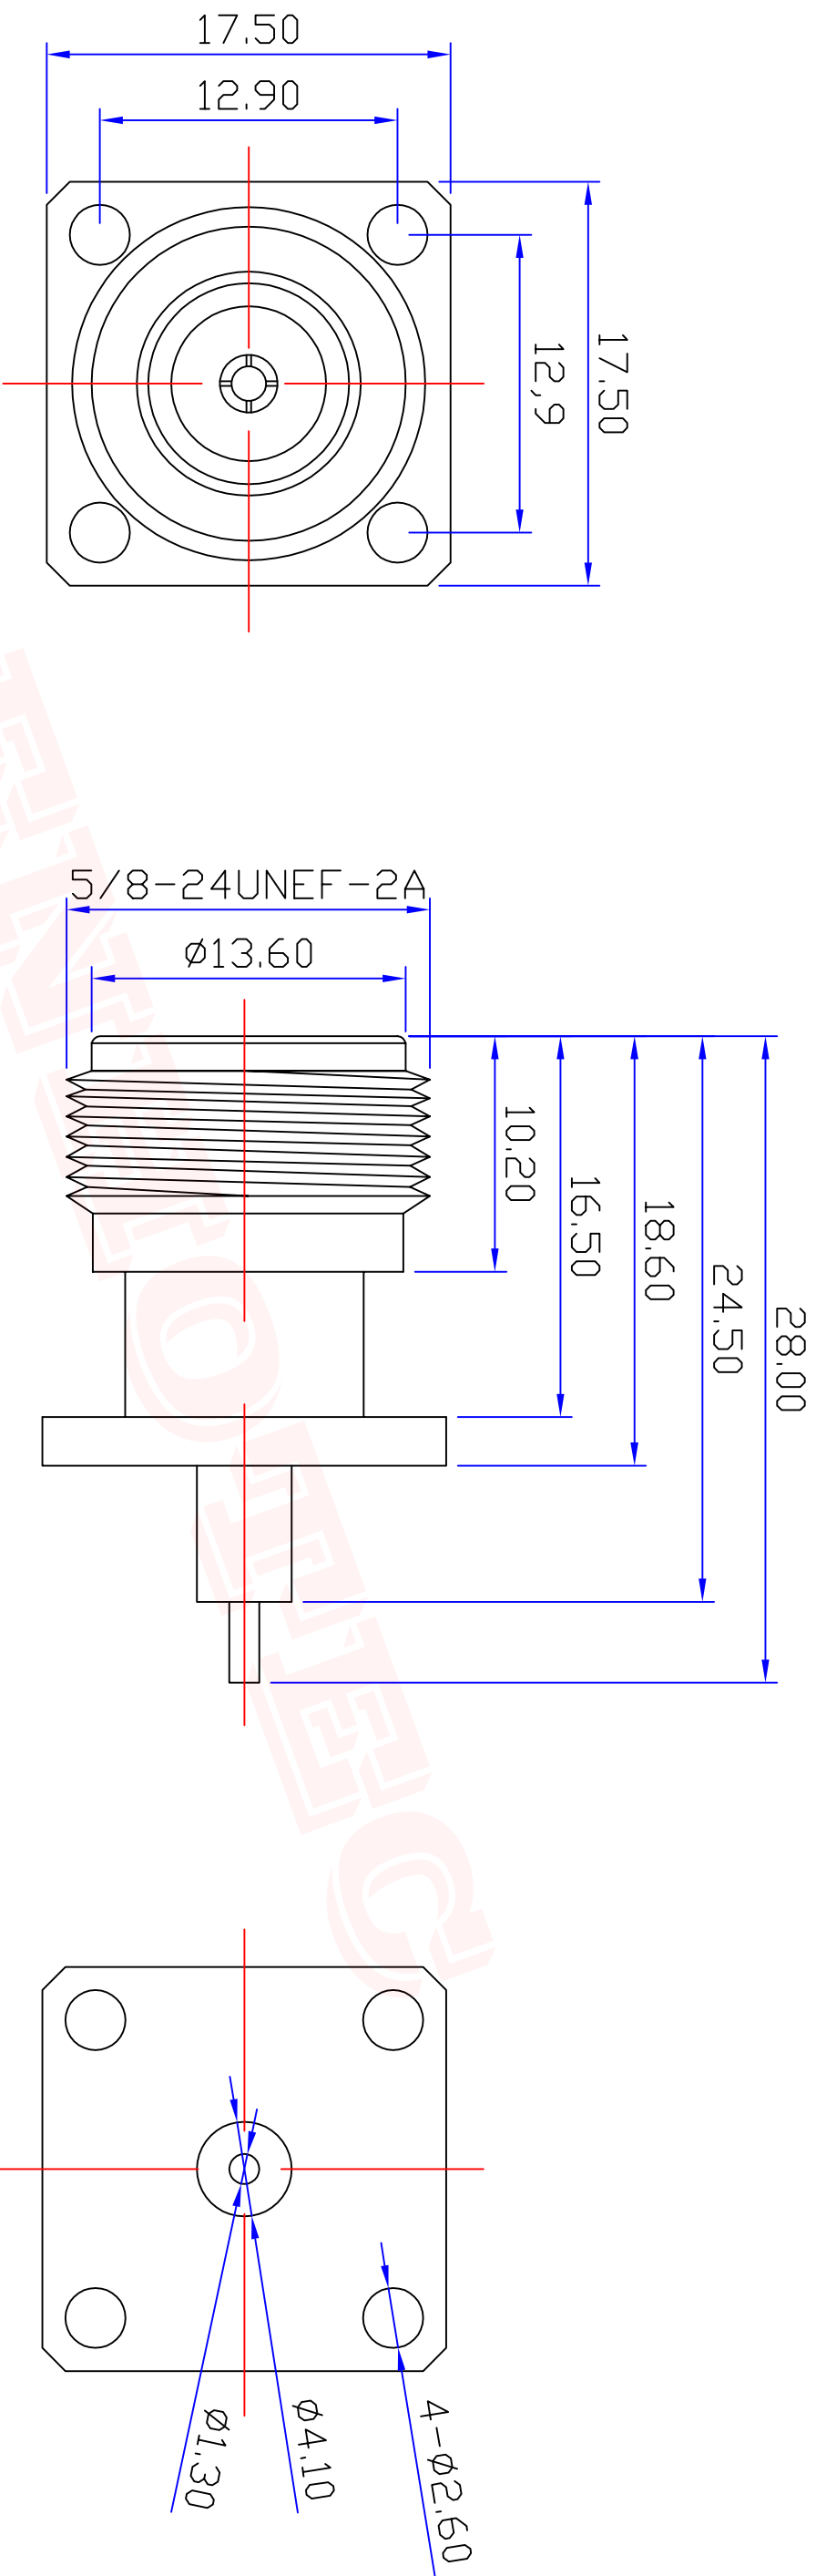

Specifications

Impedance: 50 Ohms
 Frequency Range: 0-11G
 VSWR: 1.3MAX
 Working Voltage: 1000 VRMS (max at sea level)
 Dielectric Withstanding Voltage: 1500 vrms (max at sea level)
 Insulation Resistance: 5000 Ohms min
 Durability Mating: 500 Cycles min
 Temperature Range: -65°C TO +165°C

3	PIN	BRASS	GOLD	1
2	INSULATION	TEFLON	WHITE	1
1	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED				RENHOTEK GROUP	
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:				RENHOTEK GROUP	
0.5 - 8mm	$\pm 0.20\text{mm}$			RENHOTEK GROUP	
8 - 30mm	$\pm 0.40\text{mm}$			RENHOTEK GROUP	
30 - 120mm	$\pm 0.50\text{mm}$			RENHOTEK GROUP	
Appd:	JIM. KING			RENHOTEK GROUP	
Check:				RENHOTEK GROUP	
Draw:	Gavin			RENHOTEK GROUP	
PART DESCRIPTION:				RENHOTEK GROUP	
Famale N Type JACK Connectors				RENHOTEK GROUP	
P/N:	RHT-614-0208			RENHOTEK GROUP	
Date	2018/03/12			RENHOTEK GROUP	
Scale	Free			RENHOTEK GROUP	
Unit	MM			RENHOTEK GROUP	
Type	Z			RENHOTEK GROUP	
Page	1/1			RENHOTEK GROUP	