




| | | | | |
|-------------|-------------|--------------|------------|----------|
| Product NO. | | RHT-614-0238 | | |
| REV | DESCRIPTION | DMN | DATE | APPROVEN |
| A | First issue | Gavin | 2018/03/12 | JIM.KING |

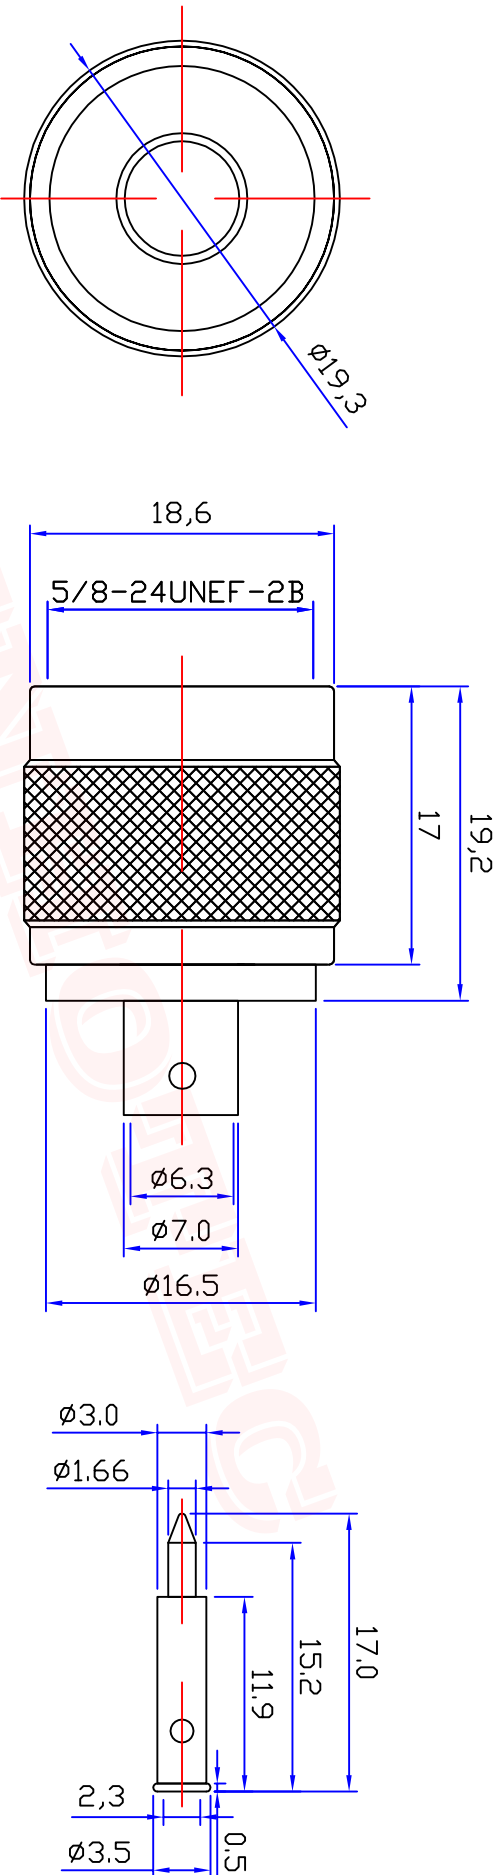

Specifications
 Impedance: 50 Ohms
 Frequency Range: 0-11G
 VSWR: 1.3MAX
 Working Voltage: 1000 VRMS (max at sea level)
 Dielectric Withstanding Voltage: 1500 vrms (max at sea level)
 Insulation Resistance: 5000 Ohms min
 Durability Mating: 500 Cycles min
 Temperature Range: -65°C T0 +165°C

| | | | | |
|----|-------------|----------|--------|-----|
| 3 | PIN | BRASS | GOLD | 1 |
| 2 | INSULATION | TEFLON | WHITE | 1 |
| 1 | BODY | BRASS | NICKEL | 1 |
| NO | DESCRIPTION | MATERIAL | FINISH | QTY |
| 1 | | | | |

| | | | | | | | |
|--|--|----------------|--|---|--|---|--|
| -TOLERANCES- UNLESS OTHERWISE SPECIFIED | | | | RENHOTEK www.renhotec.com | | RENHOTEK GROUP PART DESCRIPTION: N PLUG CONNECTORS | |
| UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: | | Appd: JIM.KING | | P/N: RHT-614-0238 | | Date | |
| 0.5 - 8mm ± 0.20mm | | Check: | | Scale | | Unit | |
| 8 - 30mm ± 0.40mm | | Draw: Gavin | | Free | | MM | |
| 30 - 120mm ± 0.50mm | | Date | | 2018/03/12 | | Free | |
| | | Date | | 2018/03/12 | | Free | |
| | | Scale | | | | Unit | |
| | | Date | | | | Type | |
| | | Date | | | | Page | |
| | | Date | | | | 1/1 | |