





Product NO.		RHT-614-0240		
REV	DESCRIPTION	DMN	DATE	APPROVEN
A	First issue	Gavin	2018/03/12	JIM.KING

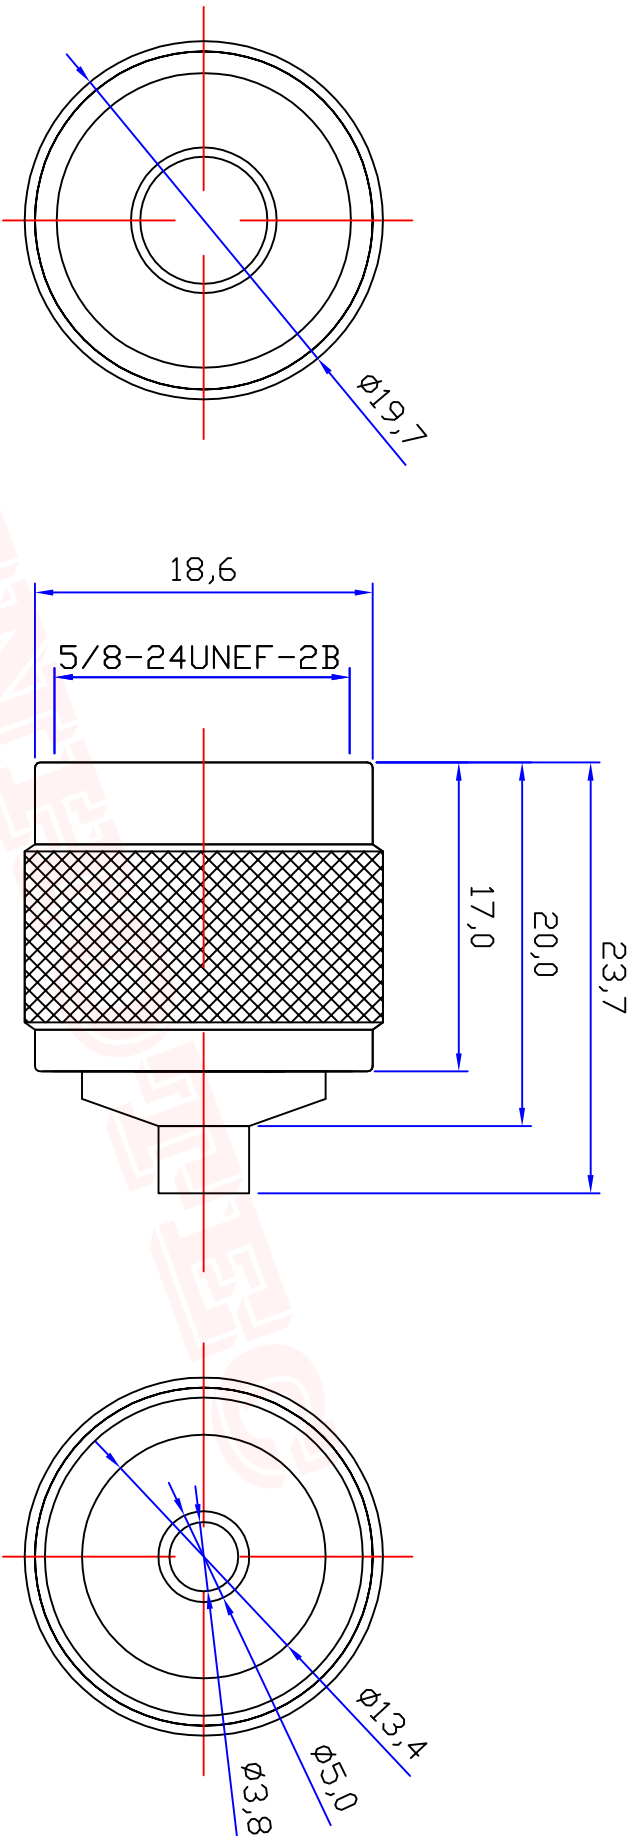

Specifications  
 Impedance: 50 Ohms  
 Frequency Range: 0-11G  
 VSWR: 1.3MAX  
 Working Voltage: 1000 VRMS (max at sea level)  
 Dielectric Withstanding Voltage: 1500 vrms (max at sea level)  
 Insulation Resistance: 5000 Ohms min  
 Durability Mating: 500 Cycles min  
 Temperature Range: -65°C To +165°C

NO	DESCRIPTION	MATERIAL	FINISH	QTY
3	PIN	BRASS	GOLD	1
2	INSULATION	TEFLON	RED	1
1	BODY	BRASS	NICKEL	1
N0	DESCRIPTION	MATERIAL	FINISH	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED		 <b>RENHOTEC GROUP</b> <small>www.renhotec.com</small>	
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm		PART DESCRIPTION: N PLUG CONNECTORS	
Appd: JIM.KING	P/N: RHT-614-0240	Date	Scale
Check:		2018/03/12	Free
Draw: Gavin			
		Unit	Type
		MM	Z
		Page	1/1