




Product NO.		RHT-618-0710	
REV	DESCRIPTION	DMN	DATE
A	First Issue	Garvin	2018/03/19
			APPROVEN
			JIM.KING

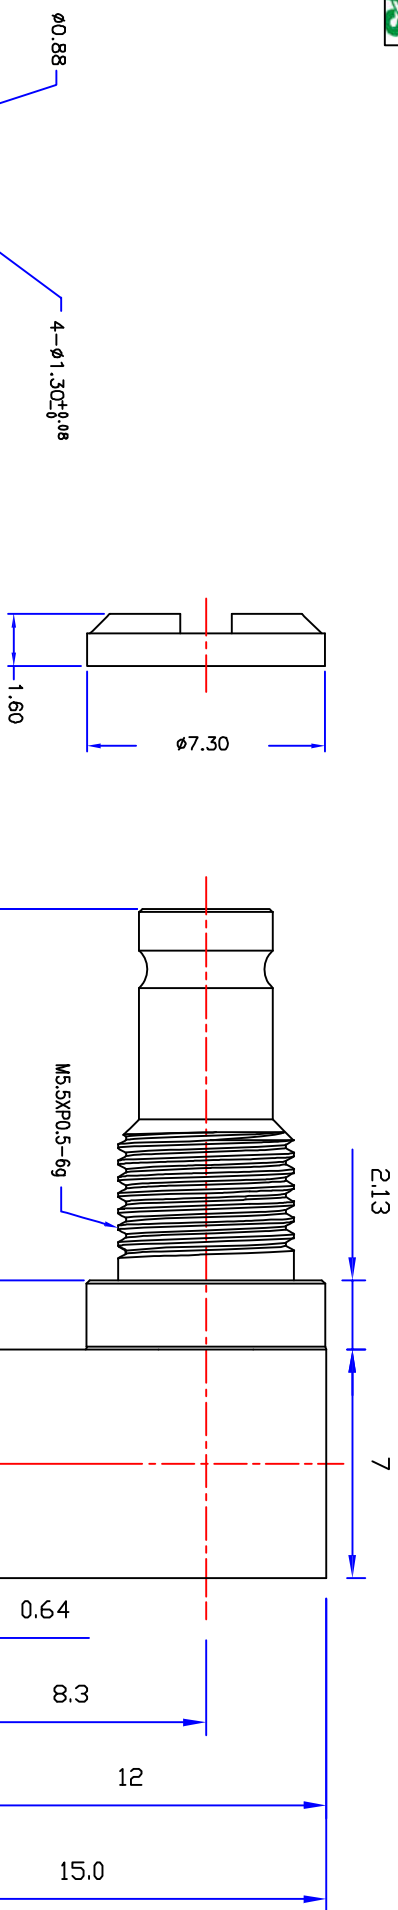

1. IMPEDANCE: 75 OHM
2. FREQUENCY RANGE: DC 0 – 4 GHZ
3. VSWR(RETURN LOSS): 1.15, MAX.
4. DIELECTRIC WITHSTANDING VOLTAGE: 750 VRMS,
5. DURABILITY: 500 CYCLES MIN.
6. TEMPERATURE RANGE: -40°C TO +155°C

6	SPANNER NUT	BRASS	NICKEL	1
5	INSULATOR	PTFE	NATURAL	1
4	HOUSING	BRASS	BRIGHT TIN	1
3	INSULATOR	PTFE	NATURAL	1
2	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
1	BODY	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

**RENHOTEC GROUP**

-TOLERANCES- UNLESS OTHERWISE SPECIFIED			
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm		<b>PART DESCRIPTION:</b> 1.0/2.3 R/A Jack for PCB	
Appd:	JIM.KING	P/N:	RHT-618-0710
Check:		Date	2018/03/19
Draw:	Garvin	Scale	Free
		Unit	MM
		Type	Z
		Page	1/1