

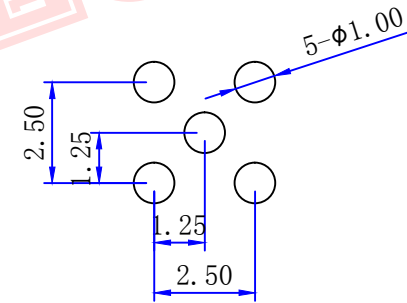
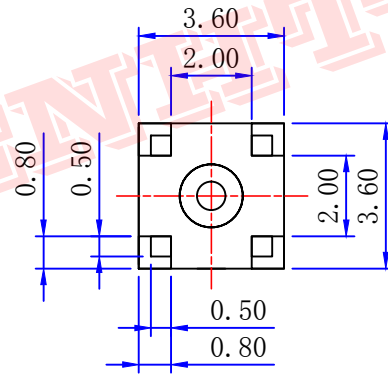


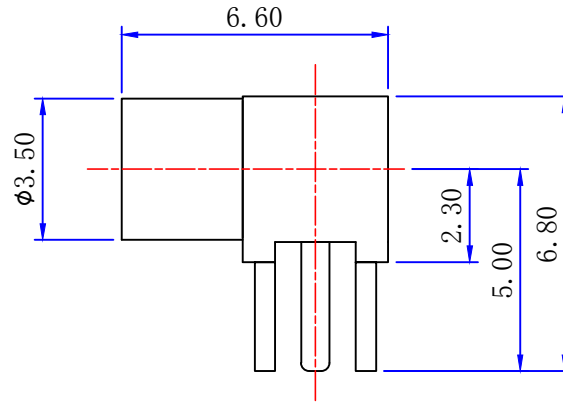

Product NO.		RHT-631-1002		
ISSUE	DESCRIPTION	DWN	DATE	APPROVEN
First	First issue	chen	2017/08/21	JIM. KING

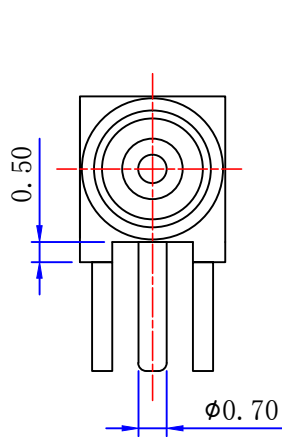

PCB

Specifications

Impedance: 50 Ohms  
 Frequency Range: 0~6Ghz  
 VSWR: 1.25max  
 Working Voltage: <170 Vrms @ sea level  
 Insulation Resistance: 5000 Ohms min  
 Temperature Range: -65°C TO +155°C  
 Drawings products are in line with ROHS standards

RENHOTEC

NO	DESCRIPTION	MATERIAL	FINISH	QTY
3	PIN	BRASS	GOLD	1
2	INSULATOR	TEFLON	NONE	1
1	BODY	BRASS	GOLD	1

-TOLERANCES- UNLESS OTHERWISE SPECIFIED		<b>RENHOTEC</b> www.renhotec.com		<b>RENHOTEC GROUP</b>			
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.10mm 8 - 30mm ± 0.15mm 30 - 120mm ± 0.20mm				PART DESCRIPTION: R/A MMCX JACK PCB MOUNT			
		Appr: JIM. KING		P/N: RHT-631-1002			
Check:		Date	Scale	Unit	Type	Page	
Draw: chen		2017.08.21	Free	MM	Z	1/1	