




Product NO.		DOSIN-809-0008		
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. CHEN	2016/2/23	John kine
B				

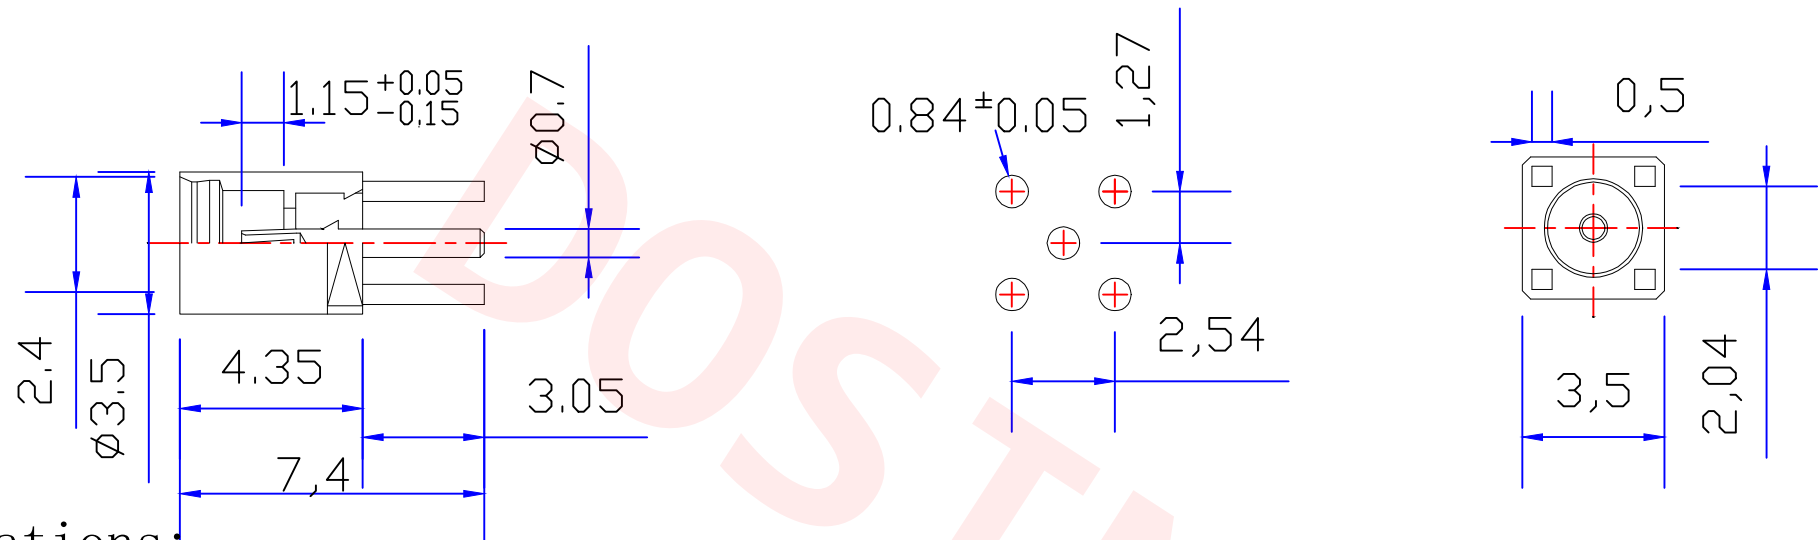

**Specifications:**

- IMPEDANCE: 50 Ohms
- Frequency range: 0~6GHZ
- VSWR: 1.5MAX
- Working voltage: 500V rms @ sea level
- Insulation resistance: 5000 Ohms min
- Temperature range: -55°C TO +155°C
- Relative temperature: ≤95% (40° C ± 2° C)

8				
7				
6				
5				
4				
3	CONTACT PIN	BER. COPPER	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

NOTE:		Tolerance	X.	±0.15
			X. X	±0.10
			X. XX	±0.05
			Angular	±5°
DRAWN		View		
Zelin. Zhang				
CHECKED		UNIT	MM	
APPROVALS		SCALE	1:1	
John				

<b>Dosin Industrial (H.K) Co. Ltd</b> 东莞市德索五金电子制品有限公司 <b>Dosin Hardware Electronics Co., Ltd</b>		E-mail: dosin2005@163.com dosin2005@dosin-china.com Web: http://www.dosinconn.com TEL: (0086) 769-81153906 FAX: (0086) 769-81875836	
Name: MMCX STRAIGHT THROUGH HOLE JACK-50 OHM			
SIZE	Product NO.	REV	
A	DOSIN-809-0008	A	
DateTime	CAD FILE	SHEET: 1 OF 1	
2016/2/23	H/company drawings/BD		