





Product NO.	RHT-612-0111			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr:chen	2017//13	John kine

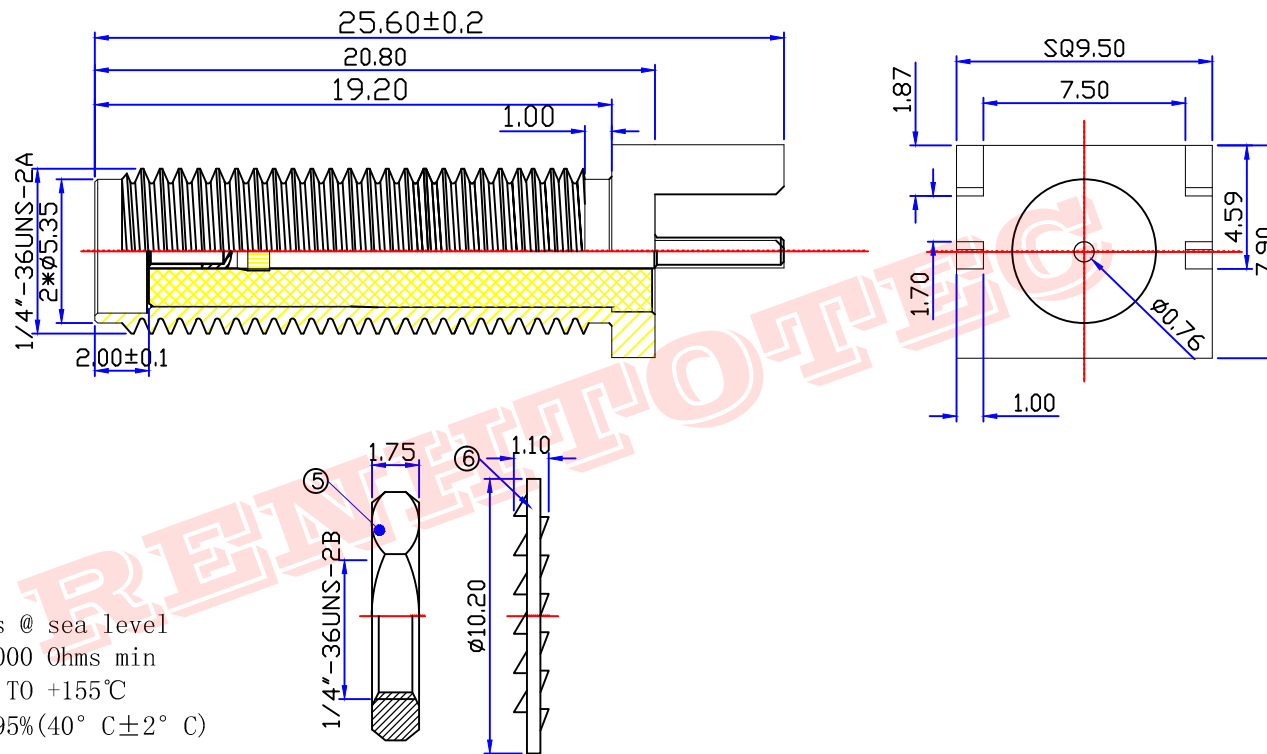

**Specifications:**

IMPEDANCE: 50 Ohms  
 Frequency range: 0~6GHZ  
 VSWR: 1.5MAX  
 Working voltage: 500V rms @ sea level  
 Insulation resistance: 5000 Ohms min  
 Temperature range: -55°C TO +155°C  
 Relative temperature: ≤95% (40° C ± 2° C)



1	Shell	Brass	AU:1-3u"	NOTE:	Tolerance	0-6	±0.10		Name: SMA JACK FOR PCB	
2	Body	Brass	AU:1-3u"			6-30	±0.20			
3	Insulator	TEFLON	None			30-120	±0.30			
4	Wsaher	Brass	AU:1-3u"			Angular	±2°			
5	NUT	Brass	AU:1-3u"							
6				DRAWN	2017/02/13	View		SIZE	Product NO. RHT-612-0111	REV
7				Zelin.chen		UNIT	MM	A		A
8				CHECKED		APPROVALS		DateTime	CAD FILE	SHEET: 1 OF 1
9				John	13/02.2017	SCALE	1:1	2017/2/13	D/company drawings/BD	
10	Component Number	Material	Finish	John	13/02.2017	SCALE	1:1	2017/2/13	D/company drawings/BD	SHEET: 1 OF 1
1				Kine						