



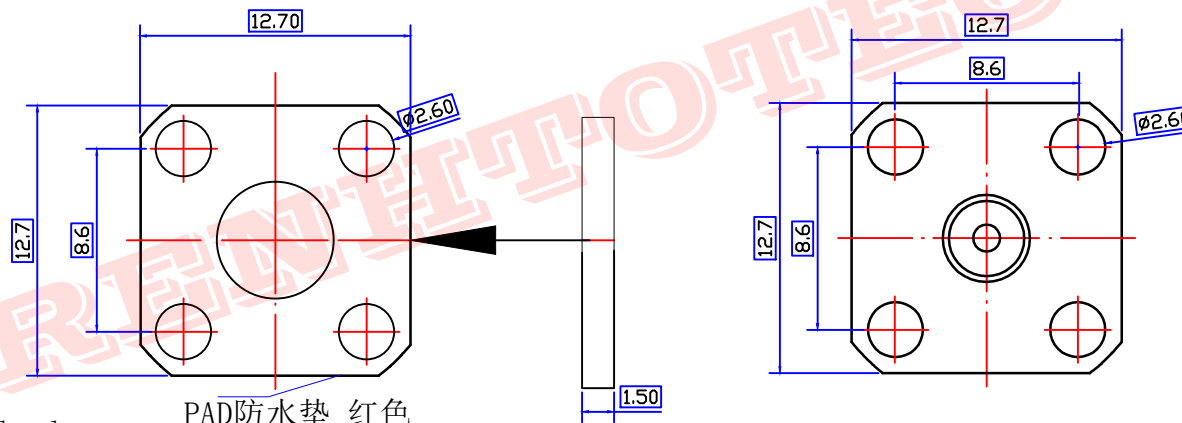

Product NO.	RHT-612-0402			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr:chen	2017//13	John kine

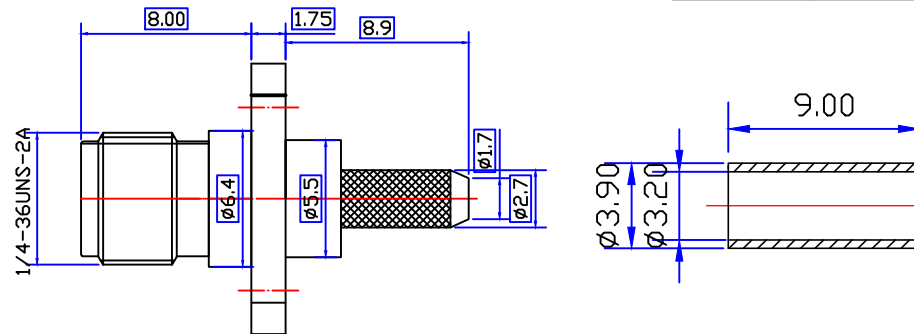

Specifications:

IMPEDANCE: 50 Ohms
 Frequency range: 0~6GHZ
 VSWR: 1.5MAX
 Working voltage: 500V rms @ sea level
 Insulation resistance: 5000 Ohms min
 Temperature range: -55°C TO +155°C
 Relative temperature: ≤95% (40° C ± 2° C)

PAD防水垫 红色

1	Shell	Brass	AU:1-3u"	NOTE:	Tolerance	0-6	±0.10	RENHOTEC GROUP www.renhotec.com	
2	Body	Brass	AU:1-3u"			6-30	±0.20		
3	Insulator	TEFLON	None			30-120	±0.30		
4	FERRULE	BRASS	NICKEL			Angular	±2°		
5				DRAWN Zelin.chen 2017/02/13	View			Name: SMA JACK FOR RG316 RG174	
6						CHECKED	UNIT		MM
7				APPROVALS John 13/02.2017	SCALE	1:1	DateTime 2017/2/13	CAD FILE D/company drawings/BD	SHEET: 1 OF 1
NO	Component Number	Material	Finish			Kine			