





Product NO.	RHT-612-0147			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr:chen	2017//13	John kine

1/4-36UNS-2B

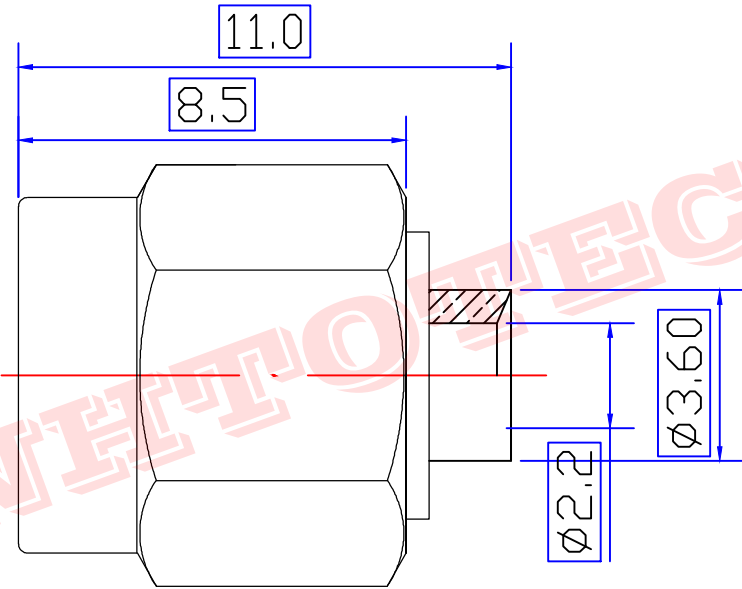

Specifications:

IMPEDANCE: 50 Ohms
 Frequency range: 0~6GHZ
 VSWR: 1.5MAX
 Working voltage: 500V rms @ sea level
 Insulation resistance: 5000 Ohms min
 Temperature range: -55°C TO +155°C
 Relative temperature: ≤95% (40° C ± 2° C)

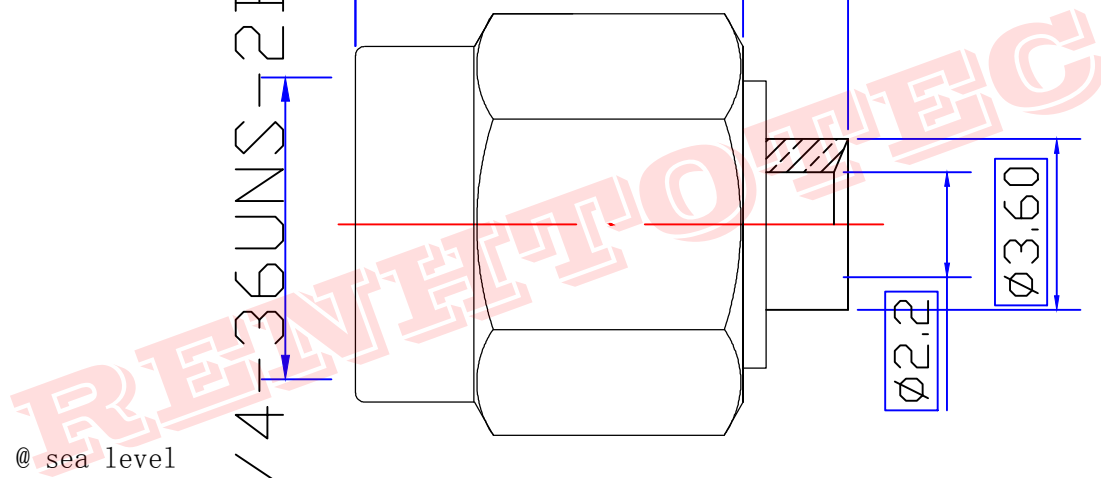

1	Body	Brass	GOLD	NOTE:	Tolerance	0-6	±0.10	RENHOTEC GROUP www.renhotec.com
2	Insulator	TEFLON	White			6-30	±0.20	
3	CONTACT PIN	Brass	GOLD			30-120	±0.30	
4					Angular	±2°		
5				DRAWN	2017/02/	View		Name: SMA JB2
6				Zelin.chen	13			
7				CHECKED		UNIT	MM	SIZE A
8				APPROVALS	13/02.2017	SCALE	1:1	Product NO. RHT-612-0147
9				John		DateTime	2017/2/13	CAD FILE
10	Component Number	Material	Finish	Kine				D/company drawings/BD
1	2	3	4	5	6	SHEET: 1 OF 1		