

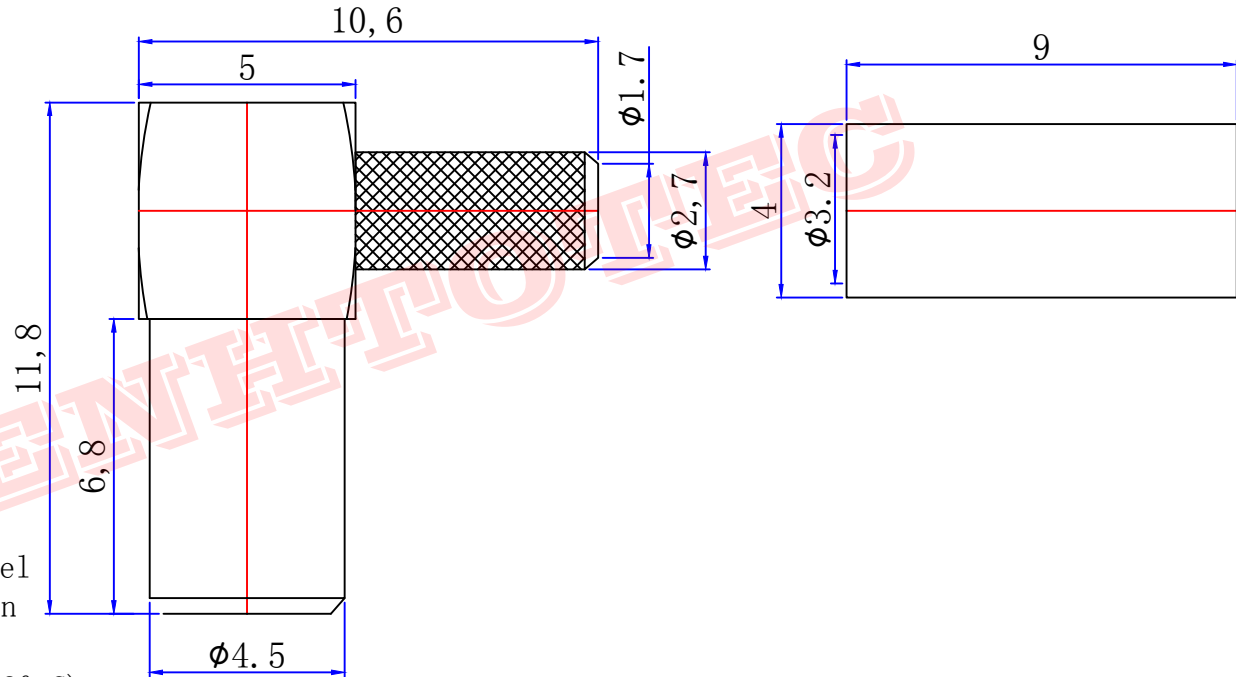




Product NO.	RHT-622-0002			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr.CHEN	2016/10/05	John kine



Specifications:

IMPEDANCE: 50 Ohms
 Frequency range: 0~8GHZ
 VSWR: 1.5MAX
 Working voltage: 500V rms @ sea level
 Insulation resistance: 5000 Ohms min
 Temperature range: -65°C TO +165°C
 Relative temperature: ≤95% (40° C ± 2° C)

1	Body	Brass	GOLD	NOTE:	Tolerance	0-6	±0.10	RENHOTEC GROUP www.renhotec.com	
2	Insulator	TEFLON	White			6-30	±0.20		
3	Center contact	Phosphor	GOLD			30-120	±0.30		
4	FERRULE	Brass	NICKEL			Angular	±2°		
5				DRAWN	View	Name: R/A-SSMB JACK FOR RG316 RG174 CABLE			
6				Zelin.Zhang					
7				CHECKED					
8					UNIT	MM	SIZE	Product NO. RHT-622-0002	REV
9					SCALE	1:1	A	A	
10				APPROVALS		DateTime	CAD FILE	SHEET: 1 OF 1	
NO	Component Number	Material	Finish	John		2016/10/05	D/company drawings/BD		
1	2	3	4	5	6				